

freud[®]



FREUD SAW BLADES



LU98R - Industrial Single Side Laminate/Melamine Blades

- Long life in production applications with modified triple-chip-grind (MTCG) design
- Fast Cutting in man-made materials including chipboard


| Coated Part No. | Dia. In. | Bore In. | Grind | Teeth | Plate In. | Kerf In. | Hook° |
|-----------------|----------|----------|-------|-------|-----------|----------|-------|
| LU98R008 | 8" | 5/8" | MTCG | 64 | .087" | .126" | + 5 |
| LU98R010 | 10" | 5/8" | MTCG | 80 | .087" | .126" | + 5 |
| LU98R012 | 12" | 1" | MTCG | 96 | .087" | .126" | + 5 |
| LU98R014 | 14" | 1" | MTCG | 108 | .098" | .138" | + 7 |

LU97M & LU97R - Ind. Double Sided Laminate/Melamine Blades

- Ultra long life in double sided man-made materials
- Chip free cut on top and bottom of material
- No scoring blade needed



| Polished Part No. | Coated Part No. | Dia. In. | Bore In. | Grind | Teeth | Plate In. | Kerf In. | Hook° |
|-------------------|-----------------|----------|----------|-------|-------|-----------|----------|-------|
| LU97M008 | LU97R008 | 8" | 5/8" | TCG | 64 | .087" | .126" | - 3 |
| LU97M010 | LU97R010 | 10" | 5/8" | TCG | 80 | .087" | .126" | - 3 |
| LU97M012 | LU97R012 | 12" | 1" | TCG | 96 | .087" | .126" | - 3 |
| LU97R014 | LU97R014 | 14" | 1" | TCG | 108 | .098" | .138" | - 3 |

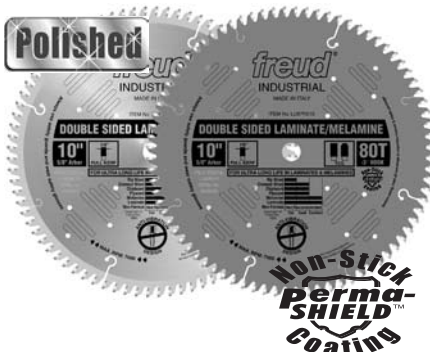


LU95M & LU95R - Industrial Solid Surface Blades

- Swirl and burn free cuts
- Special side-grind eliminates melting
- No stabilizers needed
- Laser cut anti-vibration slots give a crisp swirl-free flawless finish



| Polished Part No. | Coated Part No. | Dia. In. | Bore In. | Grind | Teeth | Plate In. | Kerf In. | Hook° |
|-------------------|-----------------|----------|----------|-------|-------|-----------|----------|-------|
| LU95M008 | LU95R008 | 8" | 5/8" | TCG | 72 | .087" | .126" | 0 |
| LU95M010 | LU95R010 | 10" | 5/8" | TCG | 72 | .087" | .126" | 0 |
| LU95M012 | LU95R012 | 12" | 1" | TCG | 72 | .087" | .126" | 0 |
| LU95R014 | LU95R014 | 14" | 1" | TCG | 72 | .087" | .126" | 0 |

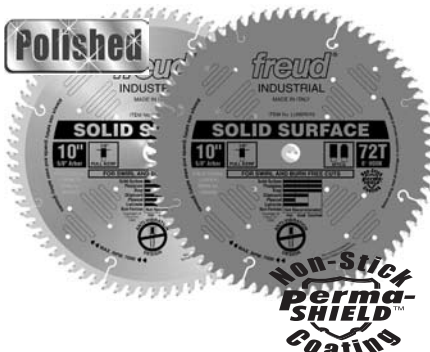

LU89M - Industrial Thick Non-Ferrous Metal Blades

- Cutting thick non-ferrous materials and aluminum
- Unique gullet design reduces chip build-up
- Use of liquid lubricant is recommended



| Polished Part No. | Dia. In. | Bore In. | Grind | Teeth | Plate In. | Kerf In. | Hook° |
|-------------------|----------|----------|-------|-------|-----------|----------|-------|
| LU89M008 | 8" | 5/8" | TCG | 58 | .098" | .122" | - 7 |
| LU89M010 | 10" | 5/8" | TCG | 72 | .098" | .122" | - 7 |
| LU89M012 | 12" | 1" | TCG | 86 | .098" | .122" | - 7 |
| LU89M014 | 14" | 1" | TCG | 100 | .118" | .142" | - 7 |
| LU89M016 | 16" | 1" | TCG | 114 | .118" | .142" | - 7 |

